

PATENT SPECIFICATION

DRAWINGS ATTACHED

828,357



Date of Application and filing Complete Specification: March 20, 1957.

No. 9078/57.

Application made in United States of America on Oct. 11, 1956.

Complete Specification Published: Feb. 17, 1960.

Index at acceptance:—Class 139, A5X.

International Classification:—G04c.

COMPLETE SPECIFICATION

Improvements in or relating to a Watch or Clock

5 We, BULOVA WATCH COMPANY, INC., of
75—20 Astoria Boulevard, Flushing 70, New
York, United States of America, a Corpora-
tion organised under the laws of the State of
New York, United States of America, do here-
by declare the invention, for which we pray
that a patent may be granted to us, and the
method by which it is to be performed, to be
particularly described in and by the following
10 statement:—

The present invention relates to a watch or
clock the timepiece mechanism of which is
driven by a vibrator, preferably of the tuning-
fork type. The vibrator and the timepiece are
15 so interconnected with each other that the rate
at which the timepiece mechanism is driven
is proportional to the natural frequency of
oscillation of the vibrator.

20 When the timepiece is first manufactured,
the vibrator is so constructed that its natural
frequency is such as to cause the timepiece
mechanism to be driven with an accuracy of
approximately plus or minus three minutes per
25 day, i.e. while the vibrator will drive the time-
piece mechanism at a constant rate which is
exactly proportional to the natural frequency
of the vibrator, this natural frequency will
probably be such that the timepiece mechanism
30 is driven either slightly too fast or slightly too
slowly, so that the timepiece will gain or lose
a certain constant amount each day.

35 According to the present invention there is
provided a watch or clock having a timepiece
mechanism and a tuning-fork type vibrator for
driving the timepiece mechanism, wherein the
vibrator and the timepiece mechanism are so
interconnected with each other that the rate at
which the timepiece mechanism is driven is
40 proportional to the natural frequency of oscil-
lation of the vibrator, means being provided
for varying the natural frequency of the
vibrator, said means being associated with at
least one tine of said vibrator and comprising
a deformable element attached to said tine,

[Price 3s. 6d.]

said element being capable of deformation into
any of a plurality of differing configurations
so as to vary the disposition of the centre of
gravity of said element with respect to the axis
of oscillation of said tine.

45 Exemplary embodiments of the present
invention are diagrammatically illustrated in
the accompanying drawing, in which:

50 Fig. 1 is a schematic representation of a
vibrator for driving a timepiece mechanism,
the natural frequency of oscillation of which
vibrator is adjustable; and

55 Fig. 2 is a fragmentary view of a further
embodiment of a vibrator the natural fre-
quency of which can be varied.

60 Referring now to the drawing, and to Fig.
1 thereof in particular, there is shown a tun-
ing-fork type vibrator 1 having a base portion
2 and a pair of tines 3 and 4, the vibrator
being soldered, welded or otherwise fixedly
65 secured to a member 5 which, in turn, is suit-
ably fixed to the base plate of the timepiece,
as, for example, by a pair of screws 5a, in
such a manner that the tines are freely oscillat-
able about their respective axes of oscillation
3¹ and 4¹.

70 A pawl 6 which has a natural frequency con-
siderably greater than, and preferably at least
twice as great as, the maximum obtainable
frequency of the vibrator is attached to the
tine 4, the other end of the pawl, which may
75 be in the form of a leaf spring, being in en-
gagement with a ratchet wheel 7. The ratchet
wheel 7 is preferably so positioned that its axis
of rotation is normal to the plane of oscillation
of the vibrator.

80 Each of the tines carries at or near its free
end an electrical oscillating component in the
form of a magnetic drum 8 which is com-
posed of a cup-shaped member 8a and a bar
magnet 8b made of a very strong magnetic
85 material such as Alnico. Each of the drums is
thus formed with an inner annular chamber
8c.

A pair of tubular carriers 9 project into the two chambers 8c, respectively, each of these carriers being at one of its ends either directly or indirectly secured to the base plate. One of the carriers carries a coil 10 and the other carries a coil 11 which has approximately five to six times as many turns as the coil 10, the arrangement of the parts being such that each carrier 9 encompasses the respective bar 8b with clearance and that each cup-shaped member 8a encompasses the respective coil with clearance, so that the magnetic drums are freely movable relative to the stationary carriers and coils. Oscillation of the tines 3 and 4 is therefore not impeded, and each of the coils together with its magnetic drum forms an electro-mechanical transducer.

One terminal of the coil 10 is connected to the base B of a transistor which is preferably of the Germanium junction-type, and the other terminal of the coil 10 is connected to one terminal of a parallel circuit incorporating a resistor 12 and a capacitor 13. The other terminal of this parallel circuit is connected to the negative terminal 14 of a battery or other voltage source the positive terminal 15 of which is connected to the transistor emitter E. One terminal of the coil 11 is connected to the transistor collector C and the other terminal of the coil 11 is connected to the negative terminal 14.

The above circuit is a self-regulating one in that it will cause the tines to oscillate not only at their natural frequency, but also at a substantially constant amplitude. In practice, the amplitude of oscillation of the tines will be maintained between such maximum and minimum amplitudes that the length of the stroke of reciprocation of the pawl, in a direction tangent to the ratchet wheel at the point of engagement between the pawl and the ratchet wheel, will be at least as great as the pitch P of each ratchet tooth but not more than 2P, so that the vibrator will cause the ratchet wheel to be rotated at a rotational speed directly proportional to the frequency of oscillation of the vibrator.

In order to increase the accuracy obtainable from the timepiece, suitable means are provided for varying or pre-setting the natural frequency of the vibrator. According to the present invention, these means are in the form of a deformable element or elements carried either by one tine or by both, the position of the center of gravity of which element or elements can be adjusted relative to the axis of oscillation of the respective tine.

In the embodiment illustrated in Fig. 1, the adjusting means for adjusting the natural frequency of each tine are in the form of a deformable wire or the like 16 which is attached at one of its ends to the magnetic drum 8, it being understood, however, that the wire 16 may be attached to the tine directly. The wire is capable of assuming different configurations,

two of which are shown in dotted lines at 16¹ and 16¹¹ wherein the center of gravity of the wire is spaced different distances from the axes of oscillation 3¹, 4¹ of the tines 3, 4, respectively.

It will be understood that inasmuch as the natural frequency of a tuning fork type vibrator is the average of the natural frequencies of its tines, the effective natural frequency of the entire vibrator can be adjusted simply by varying the natural frequency of one of the tines. However, by providing individual frequency adjusting means for each tine, the natural frequency of the vibrator can be regulated while maintaining the natural frequencies of the two tines equal to each other. In this way, no energy transfer from one tine to the other takes place during oscillation so that the efficiency of the vibrator is very high.

Also, it has been found that the frequency energy consumption of the vibrator may be kept exceedingly small by positioning the drums 8 in such a manner that their centers of gravity G, when the tines are at rest, are spaced from the plane of symmetry X—X of the vibrator a distance D_G which is substantially equal to the distance D₀ which the axis of oscillation of each tine is spaced from this plane of symmetry. The wires 16 are therefore mounted on the drums 8 in such a manner that irrespective of the natural frequency at which the tines are adjusted to oscillate, the center of gravity of the combined mass constituted by each drum 8 and wire 16, when the tines are at rest, is still spaced the same distance D_G from the plane of symmetry X—X.

The embodiment illustrated in Fig. 2 differs from the above-described one only in that each of the wire weight elements 16 is attached at both of its ends to one of the drums 8, with different configurations of the wire being shown at 16¹ and 16¹¹.

WHAT WE CLAIM IS:—

1. A watch or clock having a timepiece mechanism and a tuning-fork type vibrator for driving the timepiece mechanism, wherein the vibrator and the timepiece mechanism are so interconnected with each other that the rate at which the timepiece mechanism is driven is proportional to the natural frequency of oscillation of the vibrator, means being provided for varying the natural frequency of the vibrator, said means being associated with at least one tine of said vibrator and comprising a deformable element attached to said tine, said element being capable of deformation into any of a plurality of differing configurations so as to vary the disposition of the centre of gravity of said element with respect to the axis of oscillation of said tine.

2. A watch or clock according to claim 1, wherein said element is constituted by a deformable wire.

3. A watch or clock according to either of

70

75

80

85

90

95

100

105

110

115

120

125

130

the preceding claims, wherein both tines of the vibrator are associated with said elements.

5 4. A watch or clock according to claim 2, wherein both ends of said wire are rigidly coupled to the associated tine.

10 5. A watch or clock according to any one of claims 1 to 3, wherein both tines carry at or near their free ends electrical oscillating components the centre of gravity of each of which, when the tines are at rest, is spaced from the plane of symmetry of the vibrator the same distance which the axis of oscillation of the respective tine is spaced from the said plane of symmetry, and wherein said deformable elements are carried either by the electrical oscillating components or by the tines themselves in a region near the respective elec-

trical oscillating component and are so constructed and arranged that the centre of gravity of the combined mass constituted by each electrical oscillating component and deformable element, will, when the tines are at rest, still be spaced the same distance from said plane of symmetry irrespective of the natural frequency at which the tine is adjusted to oscillate. 20

25 6. A watch or clock substantially as hereinbefore described with reference to the accompanying drawings.

HASELTINE, LAKE & CO.,
28, Southampton Buildings,
Chancery Lane, London, W.C.2,
Agents for the Applicants.

This drawing is a reproduction of the Original on a reduced scale.

FIG. 1.

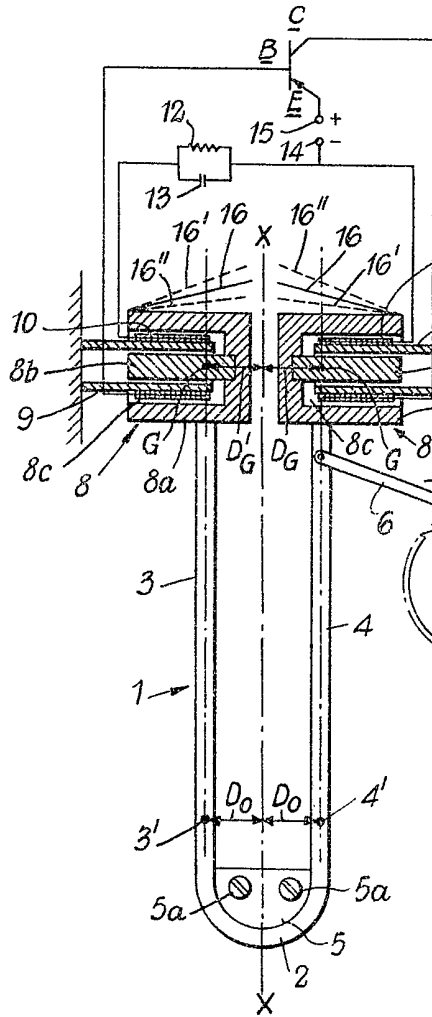


FIG. 2.

